

Ref.: 333120



STAINLESS STEEL PNEUMATIC PISTON PUMP, PUMPMASTER 4, PM4 - 3:1, STUB

PM4 series air operated piston pumps. Double acting air operated medium pressure high volume pumps for dispensing corrosive fluids in medium size installations. Pumps include height adjustable 2" BSP (M) bung adaptor for drum and tank bung mounting. Built in port for optional pressure relief valve (PN 609 007). air operated piston pumps for Fluids accessory: PN 331 110.002, PVC suction tube for 205 l drums. Instruction book: 833805.

Technical data

Documentation

More information

Fluids	Other fluids
Target product type	Double Ball Piston Pumps
Model	PM4
Application	Automotive Repair & Maintenance, Industrial Processes
Pressure ratio	3:1
Delivery	25 l/min (6,6 gal/min)
Delivery per cycle	25 l (6,6 gal)
Cycles per minute (aprox.)	100 cycles
Maximum free flow delivery	40 l/min (10,6 gal/min)
Air pressure operating range	1,5-10 bar (21,75-145 psi)
Air consumption	410 NL/min (14,5 scfm)
Maximum outlet pressure	30 bar (435 psi)
Air motor effective diameter	60 mm (2,5 ")
Air motor stroke	100 mm (4 ")
Air inlet	3/8" BSP (F)
Fluid Inlet	1" BSP (F)
Fluid inlet type	Ball check
Fluid outlet	3/4" BSP (F)
Wetted materials	PTFE, Viton, Stainless steel
Pump tube material	Stainless steel
Pump Mounting	Universal stub pump with bung adaptor
Tube height	220 mm (8,66 ")
Total height	772 mm (30,4 ")
Sound level	93 dB

Weight

8 kg (17,6 lb)

Technical data

Documentation

More information


[Login](#) or [register](#) to consult this content

Technical data

Documentation

More information

mm (in)	333 120
A	772 (30 25/64")
B	552 (21 47/64")
C	220 (8 21/32")
D	Ø 54 mm (Ø 2 1/8")

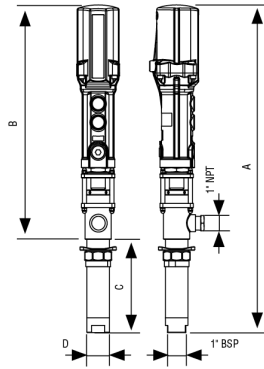

SAE 30 - 20 °C CAPACITY CURVE

